


FOLLANSBEE LIMITED VALLEY GUTTERS

LAPPED VALLEY OPTION/RECESSED VALLEY OPTION

ON ROOF PITCHES OF 12°
OR LESS THE WELTS/SEAMS
SHOULD BE FLATTENED OFF
WITH THE 'OPEN' EDGE FACING
UPWARDS.

FOR ROOF PITCHES LESS THAN
10° THE RECESS SHOULD BE
FORMED IN THE DECK AND
STRUCTURE TO MAINTAIN A
SUITABLE FALL IN THE VALLEY.

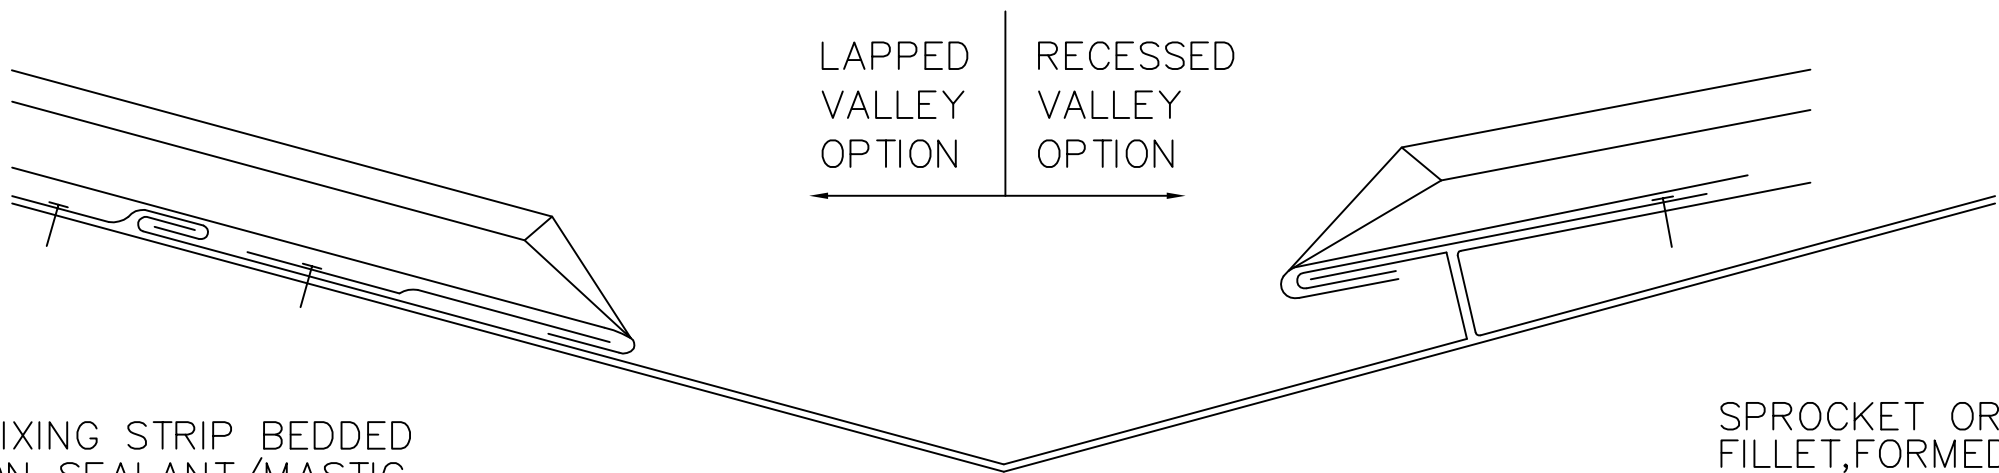

FIXING STRIP BEDDED
ON SEALANT/MASTIC

SPROCKET OR TILTING
FILLET, FORMED IN
TIMBER.

A WATER PROOF MEMBRANE SHOULD BE
LAID ON THE DECKING, ALONG THE FULL
LENGTH OF THE VALLEY.